

Technical_data_MDC10_040_1000_6_UL


Version: 01.01.2021

Page 1/1

Technical data MDC10-040-1000-6-UL

acc. UL508i			
Electrical ratings			
Rated operational voltage U_e		Vdc	600
Rated operational current I_e		Adc	30
Rated operational voltage U_e		Vdc	800
Rated operational current I_e		Adc	20
Rated operational voltage U_e		Vdc	1000
Rated operational current I_e		Adc	10
Rated insulation voltage U_i		Vdc	1000
Short circuit rating I_{cw}		kA	5
Rated impulse withstand Voltage U_{imp}		kV	8
Max. fuse rating (gPV)		Adc/Vdc	40/1000
Environmental ratings			
Maximum surrounding air temperature		°C	70
Pollution degree		Cat.	3
Over voltage category		Cat.	III
Anschlussleitung			
Wire size stranded with ferrule		AWG	14-8
Conductor material			Cu
Conductor temperature rating		°C	105
Strip length		mm	12
Terminal screws			M4
Torque terminal screws		Nm	1,2 - 1,4

Available for 1, 2 and 3MPPT

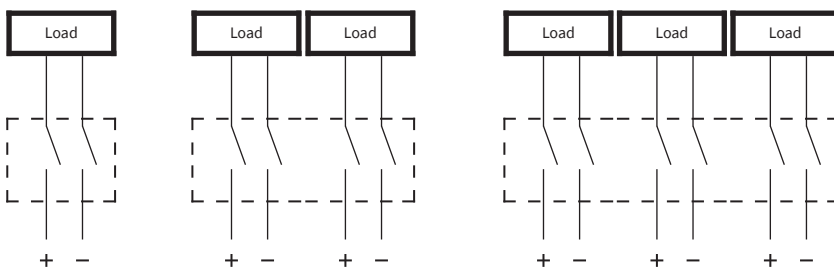

Subject to change without notice, errors and errata excepted.